



**General information:**

**EL630-1203-7** has been specifically developed to meet the DC powering requirements for telecommunications, industrial and marine applications. The output is current limited, with short circuit protection. EL630-1203-7 is a high quality and reliable linear power supply with build in a 12V 7Ah battery. The power supply work in parallel with the 12V battery, giving a no-break power supply for different electronic equipments such as fire alarm systems, intruder alarm, access control systems aso. EL630-1203-7 has relay contact output (potential free) giving information about battery condition, mains and charger failure. Light emitting diodes indicates battery condition, mains/charger "OK", overload and fuse errors.





**Details**

Tamper switch

Battery cables with fuse (30A) included

Ventilation holes

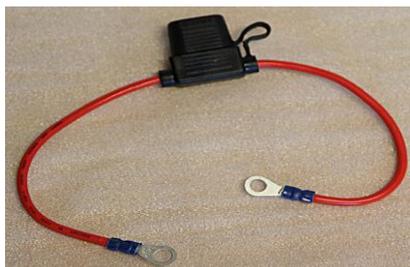

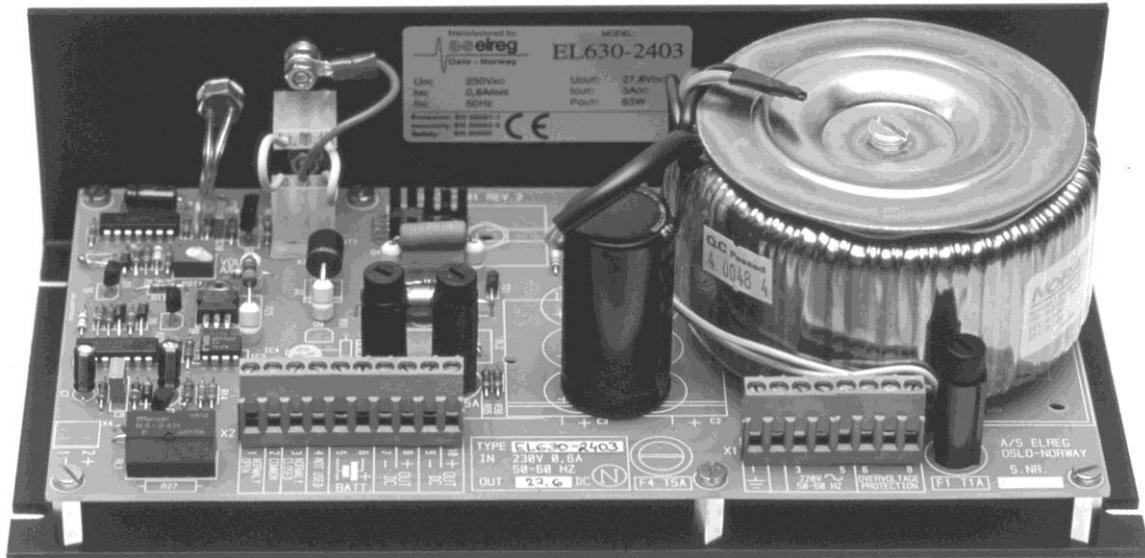

- **EL630-1203-7 key data:**

- **Output power (13,8V/3A)**
- **2 output circuits with fuses and LED's which illuminates by fuse break.**
- **Temperature compensated chargervoltage.**
- **Potential free alarm output for main/charger fault and battery failure.**
- **Separate input for battery connection to achieve a "No-Break distribution system"**
- **Built in battery test function, controlled automatically or externally.**
- **Automatic protection against deep discharging of the battery.**

- **Approved by NEMKO and marked with CE label.**  



### **Battery supervision and battery protection**

EL630-1203-7 has an automatic battery test procedure. The battery will be tested every 3 min. If the battery voltage falls below 12V, the LED marked BATTERY OK will be switched off.

This LED will illuminate again when battery voltage increases to 11,9V.

When mains disappear, the battery will supply current to the load and the LED will start flashing.

During mains failure the battery will be discharged. In order to protect the battery from completely discharging and risk for destroying, the load will be disconnected when the battery voltage has fallen down to 9,5V.

When the mains is back and the voltage has increased to 11,9V, the load will automatically be connected to the power supply again.



### **Supervising the Mains and the Charger**

The LED marked MAINS/CHARGER OK illuminates when the charger supplies current. This LED will turn off when the charger stops supplying current.



### **Alarm outputs**

EL630-1203-7 has common output in order to send information about battery condition and mains/charger condition externally.

The relay contact are potential free and withstand a current up to 2 Amps

### **Mains/Charger and battery faults:**

Relay contacts marked COMMON and NORMALLY CLOSED is connected by battery fault or mains/charger fault



### **Protection against overload and short-circuiting:**

The rectifier will limit the output current to max 3,5A and the output voltage decrease in order to maintain the output current constant without any danger for the power supply.



The charger is equipped with 2 separate outputs, each with a 5 amp fuse.

The basic purpose of these fuses are to protect the battery against irregular current draw.

Red LED`s placed with fuses illuminates when the respective fuses are broken. The LED`s will only illuminate if a load is connected to the power supply.

### **Over voltage protection:**

The Mains input is protected by a MOV (Metal oxide varistor) against transients and over voltage.

**Technical data:****Input:**

Input voltage: 210 - 250VAC 50-60 Hz  
 Input power: 78W (On full load on all outputs)  
 Over voltage protection: Yes, MOV (metal oxide varistor)  
 Input fuse: 20x5mm glass fuse 1A slow blow  
 Connections: Screw terminals max 2,5mm<sup>2</sup>

**Output:**

Voltage: 13,8VDC +/- 100mV (Adjustable +/- 2,5V)  
 Current max: 3A continuously.  
 Power max: 42W  
 Voltage accuracy: <0,5% by 0-100% load and/or input voltage variations from 210 to 250VAC  
 Output circuits : 2 pcs. Each with a 20x5mm glass fuse 5A slow blow  
 Battery input: 1 pcs. 12V 7Ah  
 Short circuit protected: Yes.  
 Protected against overload: Yes, Current limiting at 3,5Amp +/- 0,5Amp  
 Ripple and noise on output: <20mV p-p DC-30MHz, measured with a noise probe direct on the output connectors.  
 All connections: Screw terminals max 2,5mm<sup>2</sup>

**Information output / Input:**

Mains/charger faults: Potential free relay contacts no,nc,c max load 2 Amp  
 Battery fault: Potential free relay contacts no,nc,c max load 2 Amp  
 Connections: Screw terminals max 2,5mm<sup>2</sup>

**General data:**

Battery connections: Screw terminals max 2,5mm<sup>2</sup>  
 Efficiency: >65%, by full load.  
 Soft start: Yes  
 Temperature protected: Yes  
 Cabinet: Wall mounted steel enclosure  
 Weight: 15 kg inclusive battery  
 Dimensions: L\*W\*H: 410mm\*410mm\*210mm  
 Density: IP 22  
 Cooling: Free air passage  
 Ambient temperature: -20 - +60°C



**Approvals:**

Meet the requirements in the safety standard EN60950.  
 Meet the requirements in RFI/EMI standard EN55022 level B  
 EL630-1203-7 is approved by NEMKO and marked with a CE label.



Power Supply **EL630-1203-7**

**Dimensions and connection diagram**

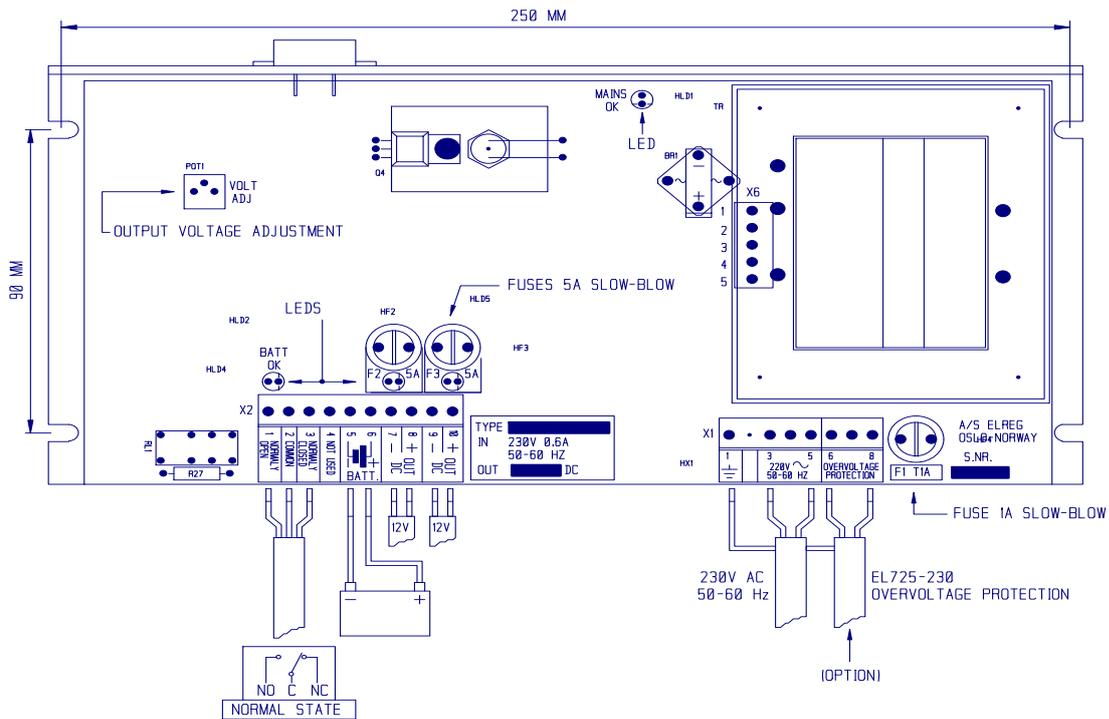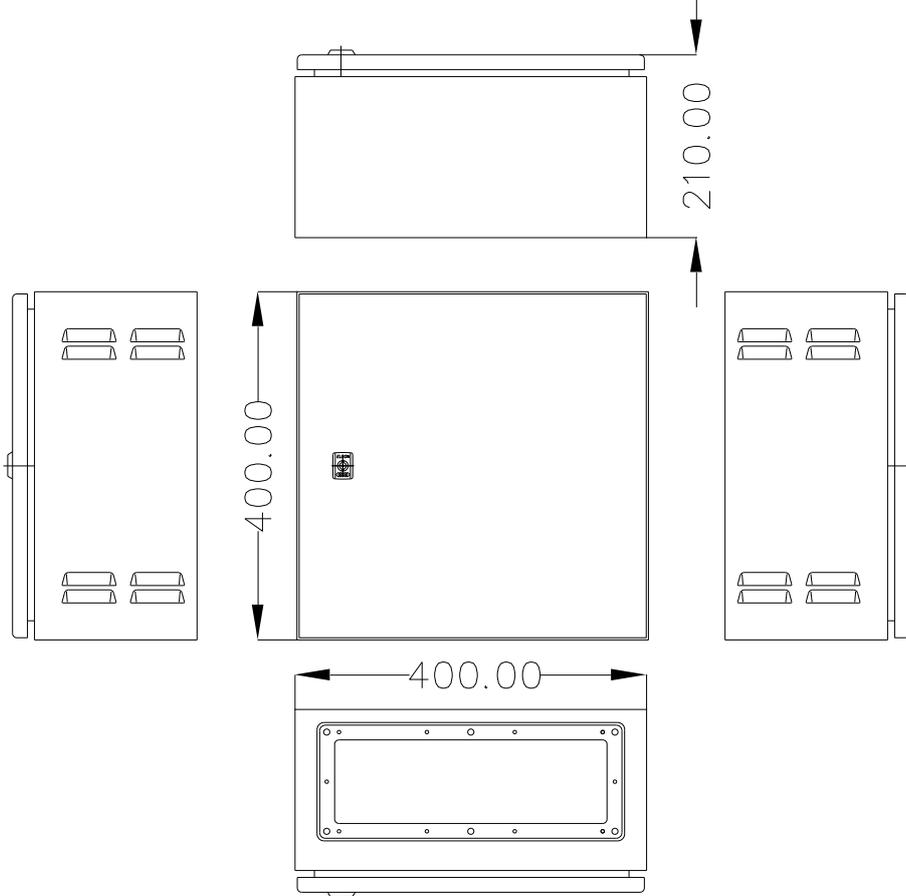



# TEST REPORT

Model:

**EL630-1203-7**

Serial no:.....

- **Output voltage adjustment**
- **Current limiting function tested**
- 
- **Measured noise and ripple**
- **Battery control function tested**
- **Mains fault function tested**
- **Deapdischarge protection tested**
- **Fuses tested**
- **Earth connection / Isolation test acc.to EN50116**

Tested by:

Date:.....

Sign:.....